



- 1. TANK IS MANUFACTURED FROM POLYETHYLENE (PE) OR CROSSLINK PE (XLPE). 2. RATED FOR STORING LIQUIDS WITH A SPECIFIC GRAVITY (DENSITY) OF 1.5SG.
- (1.9SG OR 2.2SG ALSO AVAILABLE)
- 3. ALL TANK DIMENSIONS ARE SUBJECT TO A +/-3% TOLERENCE.
 4. ALL EXTERNAL PIPING AND ACCESSORIES MUST BE FULLY SUPPORTED AND
- FLEXIBLE TO AVOID STRESSING THE TANK.
- 5. FITTING GASKETS AVAILABLE IN EPDM OR VITON.
- 6. TANK MUST BE PROPERLY VENTED TO PREVENT PRESSURE OR VACUUM FROM DEVELOPING AS THE TANK IS FILLING OR EMPTYING.

SIDE VIEW

7. TANK IS MANUFACTURED TO ASTM-D-1998 STANDARD.

MATERIALS LIST		
ITEMS	DESCRIPTION	NOTES
Α	CT-500-CH CLOSED TOP TANK	
В	16" LID WITH LOCKING STRAP	

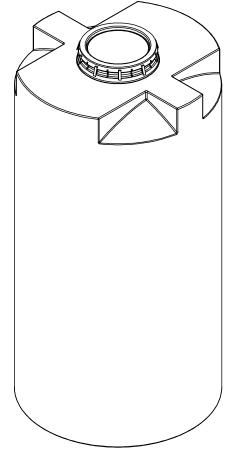



CONSENT OF ROTOPLAST INC. **ENGINEERS SEAL**

ACO CONTAINER SYSTEMS
DIVISION OF ROTOPLAST INC.
794 McKAY ROAD
PICKERING, ONTARIO, CANADA
TEL: 905-683-8222
TEL: 905-683-8222
SCALE
DATE N.T.S. NOV-17-2023

BY APPD REVD

REV 0

CT-500-CH-2024