



-120"-

FRONT VIEW

- 1. TANK IS MANUFACTURED FROM POLYETHYLENE (PE) OR CROSSLINK PE (XLPE).
 2. RATING FOR STORING LIQUIDS WITH A SPECIFIC GRAVITY (DENSITY) OF 1.5SG. (1.9SG ALSO AVAILABLE)
- 3. ALL TANK DIMENSIONS ARE SUBJECT TO A +/-3% TOLERENCE.
 4. ALL EXTERNAL PIPING AND ACCESSORIES MUST BE FULLY SUPPORTED AND FLEXIBLE TO AVOID STRESSING THE TANK.
- 5. FITTING GASKETS AVAILABLE IN EPDM OR VITON.
- 6. TANK MUST BE PROPERLY VENTED TO PREVENT PRESSURE OR VACUUM FROM DEVELOPING AS THE TANK IS FILLING OR EMPTYING.
- 7. STANDARD LID IS 15" NON-VENTED. LID ALSO AVAILABLE IN 21" VENTED OR
- 8. TANK IS MANUFACTURED TO ASTM-D-1998 STANDARD

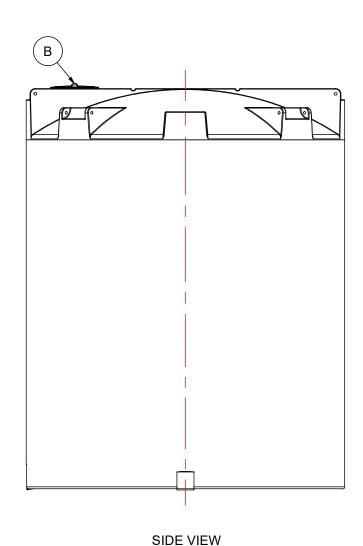

MATERIALS LIST						
ITEMS	DESCRIPTION	NOTES				
Α	CT-5420 CLOSED TOP TANK					
В	15" THREADED LID					

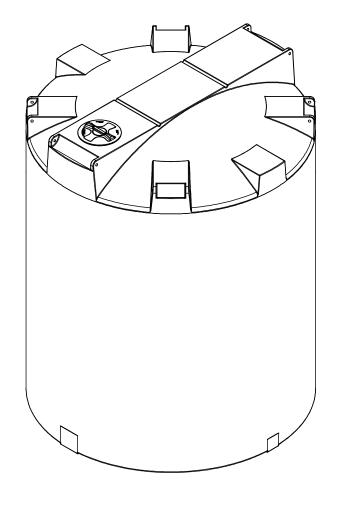

REV	DATE	DESCRIPTION	BY	APPD	REVD				
	REVISIONS								
CUSTOMER									

ACO JOB NO: TITLE 5400 IG CLOSED TOP TANK PURCHASE ORDER NO: PURCHASER'S EQUIP. NO:

THIS DRAWING IS THE PROPERTY OF ROTOPLAST INC.
AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE
WRITTEN CONSENT OF ROTOPLAST INC.

ENGINEERS SEAL

ACO CONTAINER SYSTEMS DIVISION OF ROTOPLAST INC.

DESIGNED

ACO CONTAINER SYSTEMS
DIVISION OF ROTOPLAST INC.
794 MCKAY RD.
PICKERING, ONTARIO, CANADA DRAWN CHECKED APPROVED SCALE DATE TEL. 905-683-8222 FAX 905-683-2969 02-03-16 CT-5420 REV 0