


NOTE

- 1. TANK IS MANUFACTURED FROM POLYETHYLENE (PE) OR CROSSLINK PE (XLPE).
- 2. RATING FOR STORING LIQUIDS WITH A SPECIFIC GRAVITY (DENSITY) OF 1.5SG. (1.9SG OR 2.2SG ALSO AVAILABLE)
- 3. ALL TANK DIMENSIONS ARE SUBJECT TO A +/-3% TOLERENCE.
- 4. ALL EXTERNAL PIPING AND ACCESSORIES MUST BE FULLY SUPPORTED AND FLEXIBLE TO AVOID STRESSING THE TANK.
- 5. FITTING GASKETS AVAILABLE IN EPDM OR VITON.
- 6. TANK MUST BE PROPERLY VENTED TO PREVENT PRESSURE OR VACUUM FROM DEVELOPING AS THE TANK IS FILLING OR EMPTYING.

SIDE VIEW

- 7. STANDARD LID IS 16" NON-VENTED. LID ALSO AVAILABLE IN 15" OR 21" VENTED OR NON-VENTED.
- 8. TANK IS MANUFACTURED TO ASTM-D-1998 STANDARD

MATERIALS LIST					
ITEMS	DESCRIPTION	NOTES			
Α	DCT-10440 PRIMARY TANK				
В	DCT-10440 CONTAINMENT TANK				
С	15" THREADED LID				
	•				

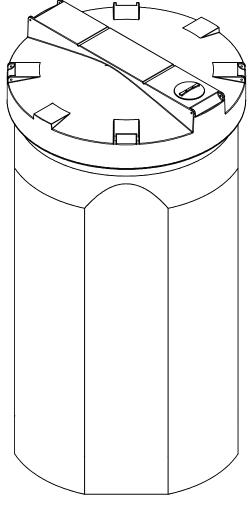

REV	DATE	DESCRIPTION	BY	APPD	REVD			
	REVISIONS							
CUSTOMER								

ITLE ACO JOB NO:
10400 IG DOUBLE WALL TANK

ACO JOB NO:
PURCHASE ORDER NO:
PURCHASER'S EQUIP. NO:

THIS DRAWING IS THE PROPERTY OF ROTOPLAST INC.
AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE
WRITTEN CONSENT OF ROTOPLAST INC.

ENGINEERS SEAL

ACO CONTAINER SYSTEMS DIVISION OF ROTOPLAST INC.

DIVISION OF ROTOPLAST INC.	DRAWN	WM	
	CHECKED		
	APPROVED		
TEL. 905-683-8222	SCALE	N.T.S.	
FAX 905-683-2969	DATE	01-04-16	
DCT-10440			