


102"


FRONT VIEW

- 1. TANK IS MANUFACTURED FROM POLYETHYLENE (PE) OR CROSSLINK PE (XLPE).
 2. RATING FOR STORING LIQUIDS WITH A SPECIFIC GRAVITY (DENSITY) OF 1.5SG.
- (1.9SG ALSO AVAILABLE)
- 3. ALL TANK DIMENSIONS ARE SUBJECT TO A +/-3% TOLERENCE.
 4. ALL EXTERNAL PIPING AND ACCESSORIES MUST BE FULLY SUPPORTED AND FLEXIBLE TO AVOID STRESSING THE TANK.

 5. FITTING GASKETS AVAILABLE IN EPDM OR VITON.
- 6. TANK MUST BE PROPERLY VENTED TO PREVENT PRESSURE OR VACUUM FROM DEVELOPING AS THE TANK IS FILLING OR EMPTYING.
- 7. STANDARD LID IS 15" NON-VENTED. LID ALSO AVAILABLE IN 21" VENTED OR NON-VENTED.
- 8. TANK IS MANUFACTURED TO ASTM-D-1998 STANDARD

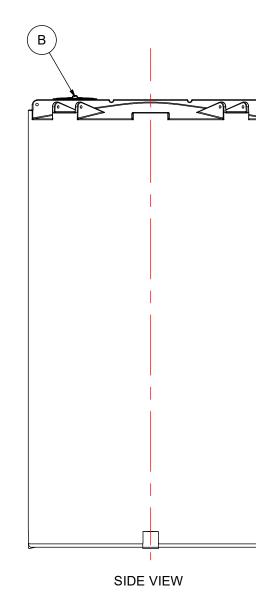

MATERIALS LIST						
ITEMS	DESCRIPTION	NOTES				
Α	CT-5002 CLOSED TOP TANK					
В	15" THREADED LID					

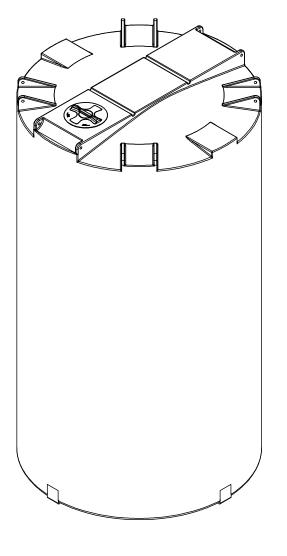

REV	DATE	DESCRIPTION	BY	APPD	REVD				
	REVISIONS								
CUST	CUSTOMER								

ACO JOB NO: TITLE 5000 IG CLOSED TOP TANK PURCHASE ORDER NO: PURCHASER'S EQUIP. NO:

THIS DRAWING IS THE PROPERTY OF ROTOPLAST INC.
AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE
WRITTEN CONSENT OF ROTOPLAST INC.

ENGINEERS SEAL

ACO CONTAINER SYSTEMS

DIVISION OF ROTOPLAST INC.

PICKERING - UNTARIO	- CANADA			
ACO CONTAINER SYSTEMS	DESIGNED			
DIVISION OF ROTOPLAST INC.	DRAWN	WM		
794 MCKAY RD.	CHECKED			
PICKERING, ONTARIO, CANADA	APPROVED			
TEL. 905-683-8222	SCALE	N.T.S.		
FAX 905-683-2969	DATE	NOV-04-202		
DWG № CT-5002			REV	0