



NOTES: 1. TANK IS MANUFACTURED FROM POLYETHYLENE (PE) OR CROSSLINK PE (XLPE). 2. RATING FOR STORING LIQUIDS WITH A SPECIFIC GRAVITY (DENSITY) OF 1.5SG. (1.9SG ALSO AVAILABLE) 3. ALL TANK DIMENSIONS ARE SUBJECT TO A +/-3% TOLERENCE. 4. ALL EXTERNAL PIPING AND ACCESSORIES MUST BE FULLY SUPPORTED AND FLEXIBLE TO AVOID STRESSING THE TANK. 5. FITTING GASKETS AVAILABLE IN EPDM OR VITON. 6. TANK MUST BE PROPERLY VENTED TO PREVENT PRESSURE OR VACUUM FROM DEVELOPING AS THE TANK IS FILLING OR EMPTYING. 7. STANDARD LID IS 15" NON-VENTED OR VENTED. LID ALSO AVAILABLE IN 21" VENTED OR NON-VENTED. 8. TANK IS MANUFACTURED TO ASTM-D-1998 STANDARD 9. BOTTOM OUTLET FITTING MAY ONLY BE INSTALLED ON A FITTING FLAT LOCATED AT 0°, 90°, 180° OR 270°.

AT 0°, 90°,180° OR 270°.

10. CONTAINMENT TANK IS 1.5SG PE AS STANDARD.

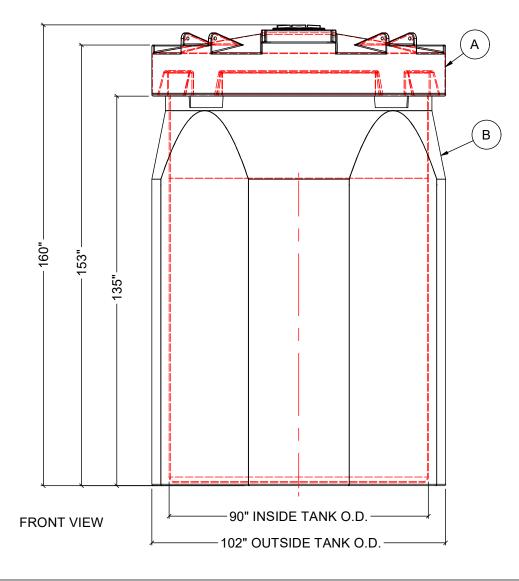

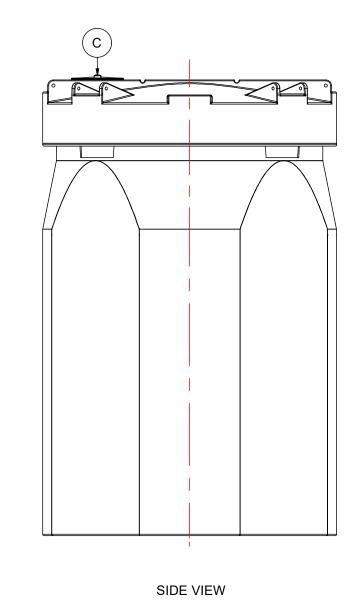

MATERIALS LIST								
ITEMS	DESCRIPTION						s	
Α	DCT-2902 PRIMARY TANK							
В	DC	DCT-2902 CONTAINMENT TANK						
C	15" THREADED LID							
<image/>								
	REV	DATE		DESCRIPTION	BY	APPD	REVD	
	CUST	OMER		REVISIONS				
	TITLE			ACO JOB NO:				
		00 IG DOUB	LE WALL	PURCHASE ORDER NO:				
		TANK PURCHASER'S EQUIP. NO:						
		THIS DRAWING IS THE PROPERTY OF ROTOPLAST INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF ROTOPLAST INC. ENGINEERS SEAL ACO CONTAINER SYSTEMS DIVISION OF ROTOPLAST INC.						
	ENG							
			DIVISION 794 MCKA PICKERIN	OF ROTOPLAST INC. D AY RD. C IG, ONTARIO, CANADA A	ESIGNED RAWN HECKED PPROVEI		VM	
		TEL. 905-683-8222 SCALE N.T.S. FAX 905-683-2969 DATE 31-03-16 DWG № DOT 00000						
	DCT-2902							